



Assessment of Air Traffic Controller Acceptability of Aircrew Route Change Requests

Husni Idris

Engility Corp. (now with NASA Ames)

Gabriele Enea

Engility Corp. (now with MITRE)

Kelly Burke and David Wing

NASA Langley

12th USA/Europe Air Traffic Management R&D Seminar
Seattle, WA, USA
June 26-30, 2017

Outline



- Background and Motivation
 - TASAR Concept and Technology Overview
 - TASAR Flight Trial Overview
- Controller Acceptability Assessment Approach and Data Collection: Observations and Interviews
- Event Observations Overview
- Results from Interviews
 - General Statistics
 - Quantitative Acceptability Factor Characterization
- Concluding Remarks
- Current and Future Activities

Outline



- Background and Motivation
 - TASAR Concept and Technology Overview
 - TASAR Flight Trial Overview
- Controller Acceptability Assessment Approach and Data Collection: Observations and Interviews
- Event Observations Overview
- Results from Interviews
 - General Statistics
 - Quantitative Acceptability Factor Characterization
- Concluding Remarks
- Current and Future Activities

TASAR Overview




- Traffic Aware Strategic Aircrew Requests (TASAR) is a NASA NextGen concept intended to assist flight optimization while accounting for wind and traffic interactions
- Advises aircrew of routes that save time or fuel and avoid known constraints such as traffic and weather



Traffic Aware Planner (TAP) Electronic Flight Bag (EFB) Application




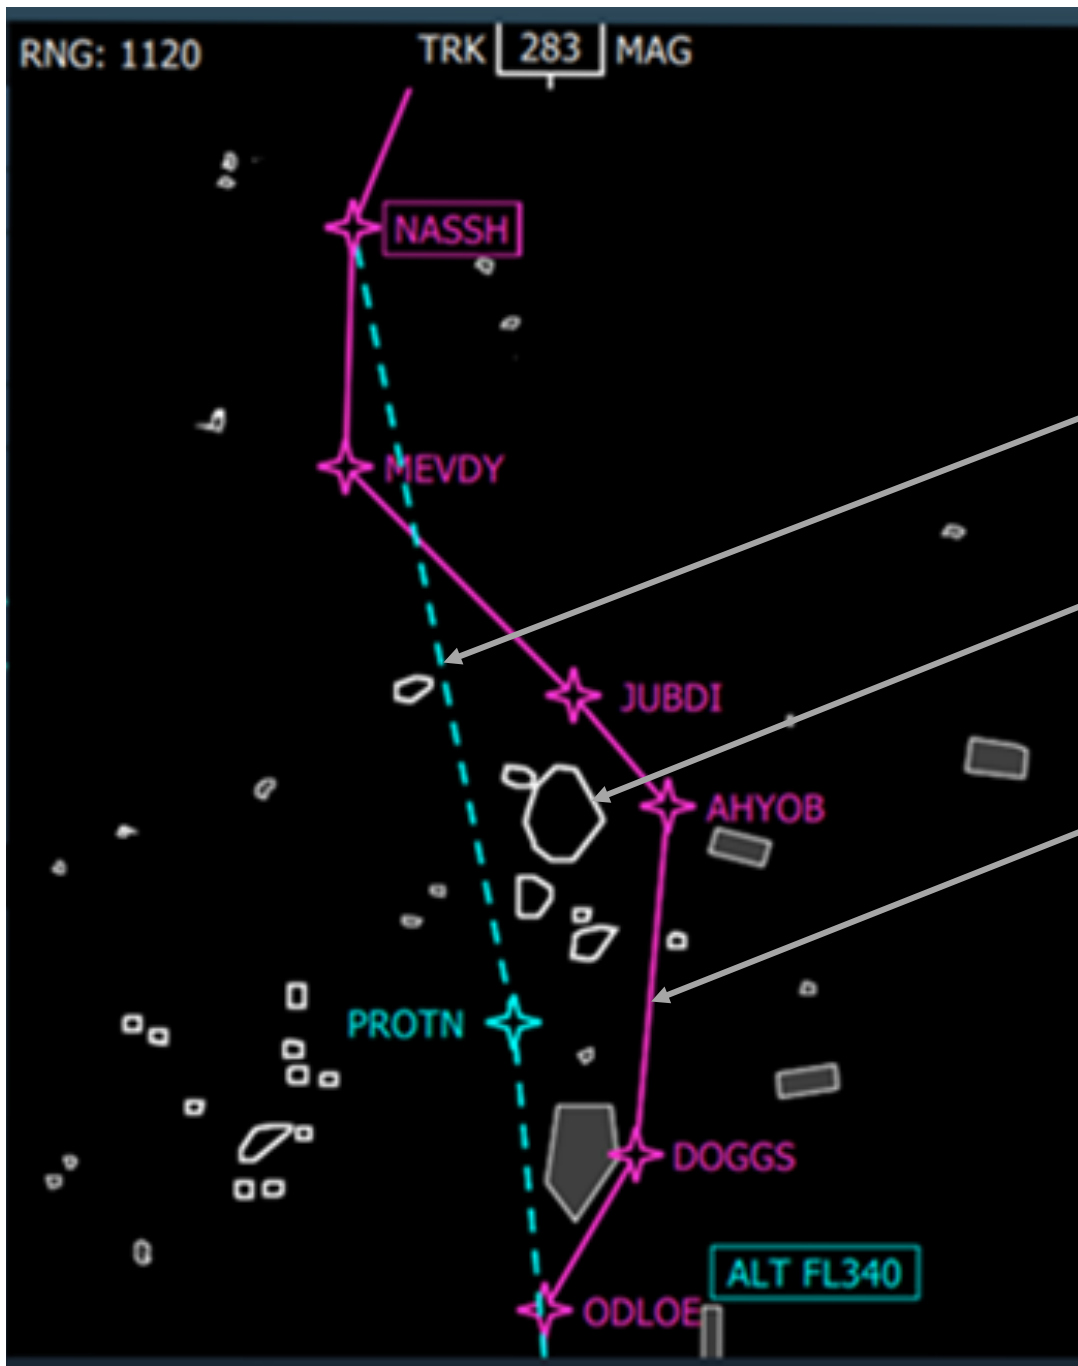

Proposed route

Hazards

Current route

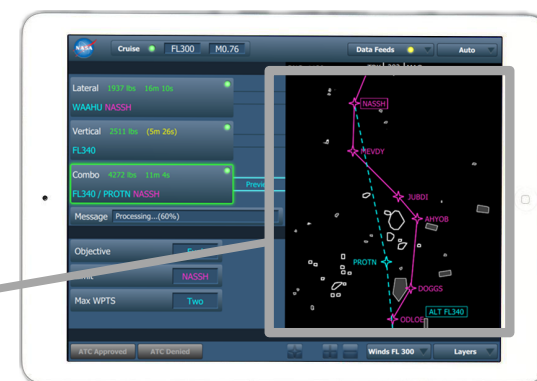

TASAR Multiple Route Advisories



NASA

Cruise ● FL300 M0.76

Lateral 1937 lbs 16m 10s ●
WAAHU NASSH

Vertical 2511 lbs (5m 26s) ●
FL340

Combo 4272 lbs 11m 4s ●
FL340 / PROTN NASSH


Preview

Message Processing...(60%)

Lateral route advisory

Vertical route advisory

Combination route advisory – Selected as best choice

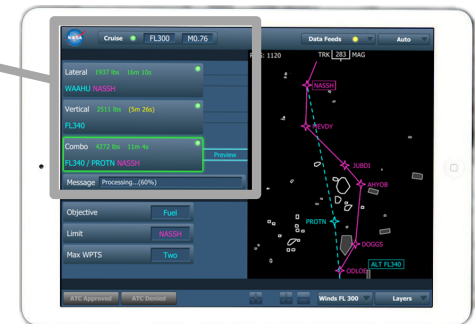

TASAR Pilot Inputs



| | |
|-----------|-------|
| Objective | Fuel |
| Limit | NASSH |
| Max WPTS | Two |

ATC Approved ATC Denied

Pilot enters objective which can come from dispatcher: optimize time, fuel or trip cost

Pilot enters return waypoint limit

Pilot enters maximum additional waypoints



TASAR Benefits Overview



- Benefit for users in terms of time and fuel savings – Initial fast-time simulation benefit assessment estimated
 - 1-4 minutes saving per flight
 - 50-550 lbs fuel savings per flight
 - (Henderson et. al. 2012)
- Increase in controller acceptance of requests by avoiding known constraints
 - ADS-B traffic from aircraft within range equipped with ADS-B Out
 - Weather, restricted airspace, flow restrictions through internet connectivity
 - On-board radar weather (planned)

TASAR Previous Research Activities



- Fast time benefit assessment
- Safety and certification analyses
- Prototyping and human machine interface (HMI) design
- Human-in-the-loop simulations for human factors analysis, for example: workload, distraction, and usability
- Flight testing
 - Flight Trial 1: Proved concept and technology feasibility in operational environment
 - Flight Trial 2: Proved operational readiness in airline environment and assessed pilot and controller acceptability (topic of this paper)

Related Research Activities




- NASA's National Airspace System Evaluation and Notification Tool (NASCENT) is ground-based platform for route change advisories
 - Provides single-flight route change advisories to airline dispatchers
 - Provides multiple-flight common-route (MFCR) advisories to traffic flow managers
- NASA is investigating air-ground integration between these tools
- Identification of controller acceptability of route changes based on objective analysis of historical traffic and flight amendment data
 - Recent publication: Evans et al, Aviation Forum 2017
 - Compliments the subjective analysis using observations and interviews presented in this paper

TASAR Flight Trial 2 Overview



- Flight trial had multiple objectives including data processing, pilot evaluation of TAP interface and controller acceptability of route change requests
- Flight test aircraft: AdvAero's Piaggio Avanti P180 – Envelope: FL410, 400 knots; two pilots and five passengers
- Evaluation pilots were senior captains from Alaska, Virgin, and other airlines
- Aircraft fitted with three instances of TAP software

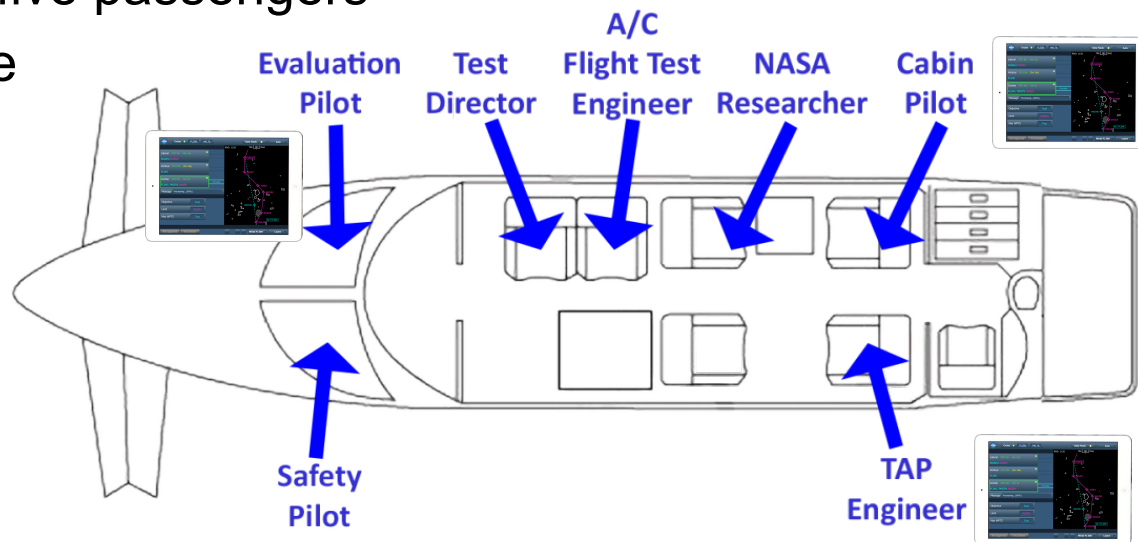

TASAR Flight Trial 2 Overview



- Six Flight Pairs from Newport News VA, Patrick Henry Field (KPHF):


- ➔ Two to Birmingham International Airport (KBHM) and two to Montgomery Regional Airport (KMGM) in Atlanta center (ZTL) to interact with high traffic
- ➔ Two to Tampa International Airport (KTPA) in Jacksonville center (ZJX) to interact with special use airspace (SUA)

- During June 8-16, 2015 – outbound in morning, inbound in afternoon

- Researchers stationed at ZTL and ZJX

- ➔ Controller observations during Avanti transits and interviews with volunteer controllers
- ➔ Coordination with Area Supervisors on flight plans, reroute requests, and interviews

- Pre-approval from FAA and NATCA

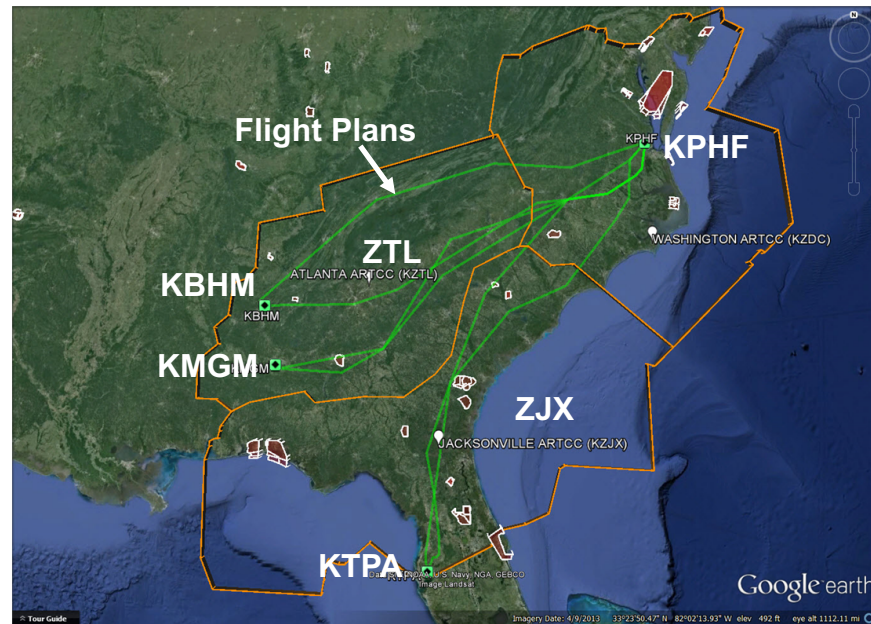

Outline



- Background and Motivation
 - TASAR Concept and Technology Overview
 - TASAR Flight Test Overview
- **Controller Acceptability Assessment Approach and Data Collection: Observations and Interviews**
- Event Observations Overview
- Results from Interviews
 - General Statistics
 - Quantitative Acceptability Factor Characterization
- Concluding Remarks
- Current and Future Activities

Controller Acceptability Assessment Overall Approach



- **Overall Goal: Identify key factors that impact air traffic controller acceptance of pilot requests to change their trajectories while in flight**
- Two independent activities conducted by observers
 1. Observations of controller handling of Avanti pilot requests
 - Some requests made as suggested by the TAP tool
 - Some requests were pre-scripted to invoke acceptance factors of interest
 - Discussed acceptance issues with controller in follow-up interview
 - Provided anecdotal examples of controller acceptance issues
 2. Focused Interviews with volunteer controllers
 - To elicit general statistics about controller acceptance factors
 - To quantify two types of controller acceptance factors:
 1. Requests interaction with airspace structure such as sector boundaries and SUA
 2. Maneuver complexity such as number of waypoints

Outline




- Background and Motivation
 - TASAR Concept and Technology Overview
 - TASAR Flight Test Overview
- Controller Acceptability Assessment Approach and Data Collection: Observations and Interviews
- Event Observations Overview
- Results from Interviews
 - General Statistics
 - Quantitative Acceptability Factor Characterization
- Concluding Remarks
- Current and Future Activities

Observation Process



Process planned with facility management and approved by NATCA

1. Before flight, ground observers adjust flight plans and scripted scenario based on weather and traffic, and convey them to airborne team in teleconference
2. While enroute, engineer onboard selects scenario based on flight position and conveys request to evaluation pilot who makes request from controller
3. Controller, not aware of test, clarifies, coordinates, accepts, or rejects request while shadowing observer takes notes
4. Observers follow flight from sector to sector
5. After flight, each observer conducts interviews with shadowed controllers – interviews are coordinated by area supervisor

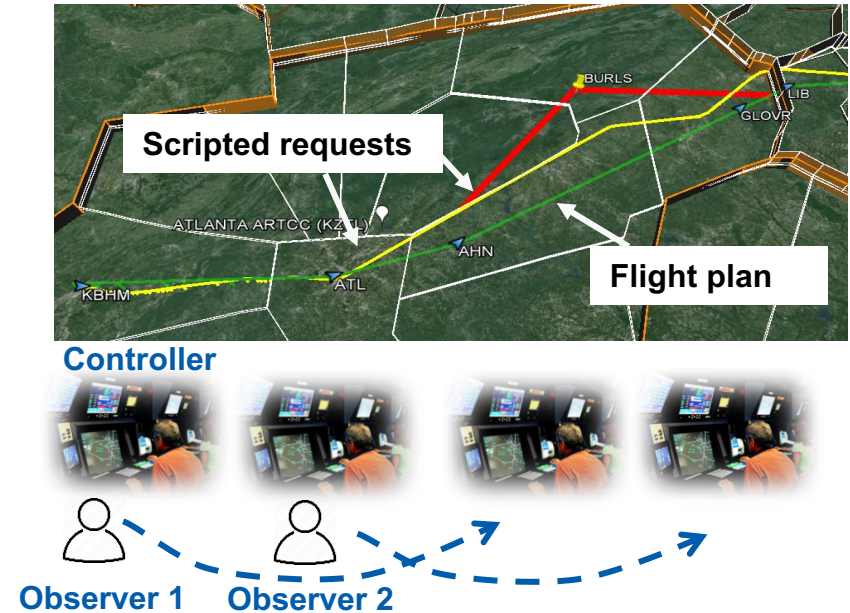

Scripted Event Observations



- Observed controllers were elicited about the observed requests made by the Avanti
- Total of 36 requests were made (7 requests from tool advisories)
 - 19 requests accepted without delay (4 requests from tool advisories)

- 9 requests accepted with delay due mainly to coordination needs (2 from tool advisories)
- 8 requests rejected for seven different reasons (only 1 from tool advisory)


Workload during event elicited from controller or estimated by observer

| Rejections | Reason | Workload |
|------------|----------------------|----------|
| 2 | Handoff | Moderate |
| 1 | Weather | High |
| 1 | Unfamiliar fix | Low |
| 1 | LOA violation | Low |
| 1 | Opposite to traffic | Low |
| 1 | Center intrusion | Low |
| 1 | Active SUA intrusion | Moderate |

Example Event: Request Flies Along Sector Boundaries



Request was accepted despite flying along boundary between sectors 50 and 34/32

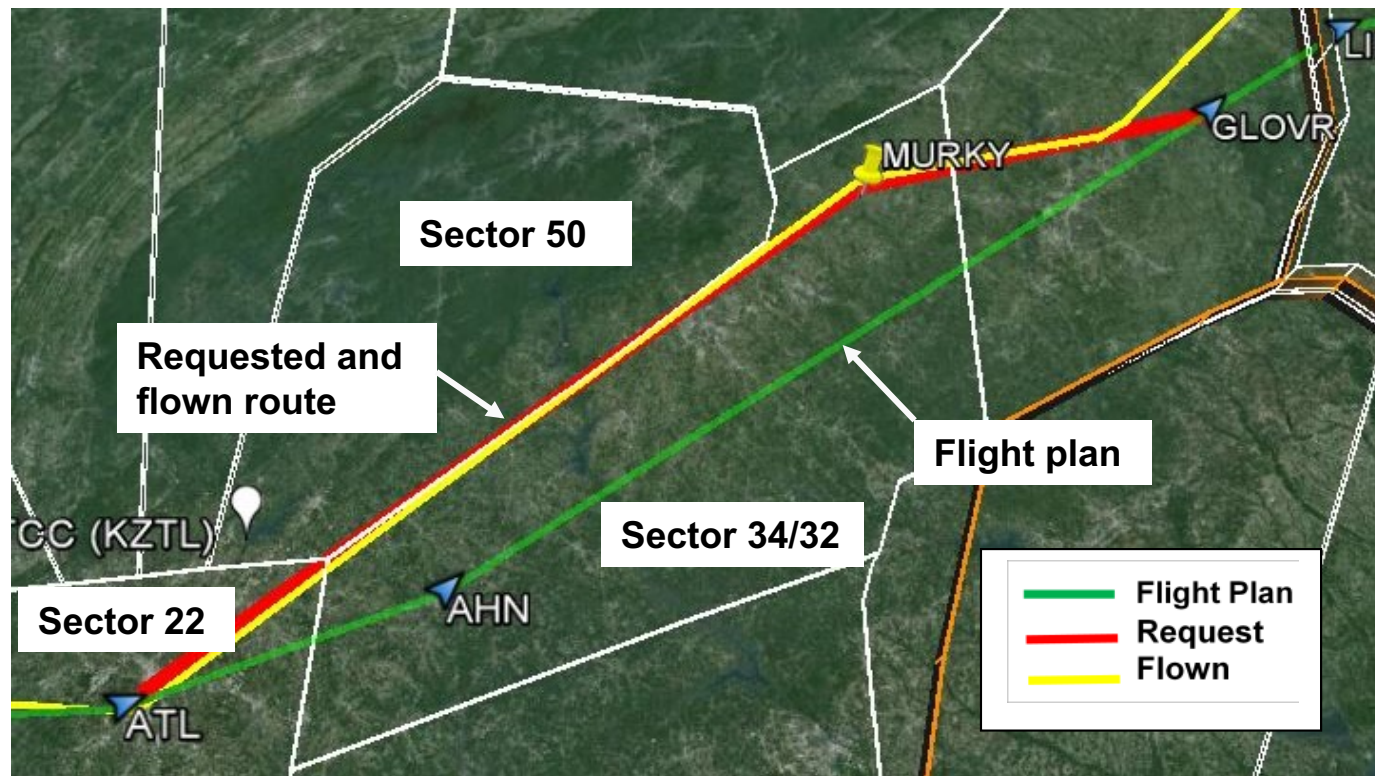


(MAP OBTAINED FROM GOOGLE EARTH)

Example Event: Request Interacts with Major Airport Flow



Request rejected due to interference with major arrival flows to ATL in sector 50

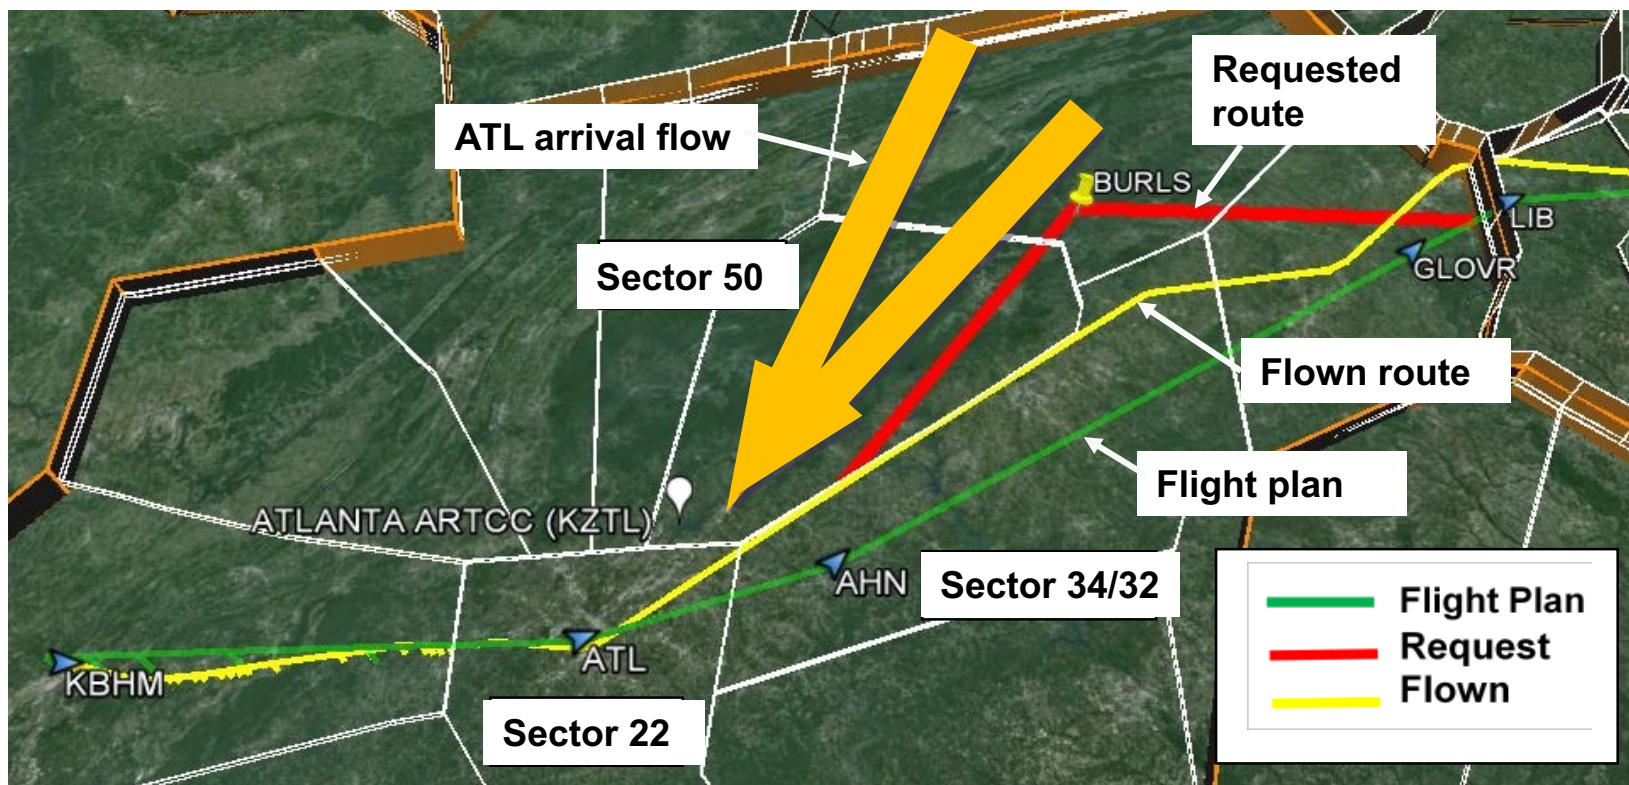

(MAP OBTAINED FROM GOOGLE EARTH)

Outline



- Background and Motivation
 - TASAR Concept and Technology Overview
 - TASAR Flight Test Overview
- Controller Acceptability Assessment Approach and Data Collection: Observations and Interviews
- Event Observations Overview
- **Results from Interviews**
 - General Statistics
 - Quantitative Acceptability Factor Characterization
- Concluding Remarks
- Current and Future Activities

Interview Data Collection



- Fifty controllers interviewed
 - including controllers who handled and did not handle Avanti test flight
- Wide range of age and experience
 - Age ranged between 25 and 55 years
 - Experienced ranged between 1 and 35 years
- Controllers signed informed consent forms before interview
- Questionnaires included
 - General statistics
 - Quantitative parameters
- Answers noted manually by observers during interview

Outline



- Background and Motivation
 - TASAR Concept and Technology Overview
 - TASAR Flight Test Overview
- Controller Acceptability Assessment Approach and Data Collection: Observations and Interviews
- Event Observations Overview
- **Results from Interviews**
 - General Statistics
 - Quantitative Acceptability Factor Characterization
- Concluding Remarks
- Current and Future Activities

How Often Pilots Make Requests




Frequency

Interview questions with one example response

1. What percentage of pilots makes requests for trajectory change?

20%

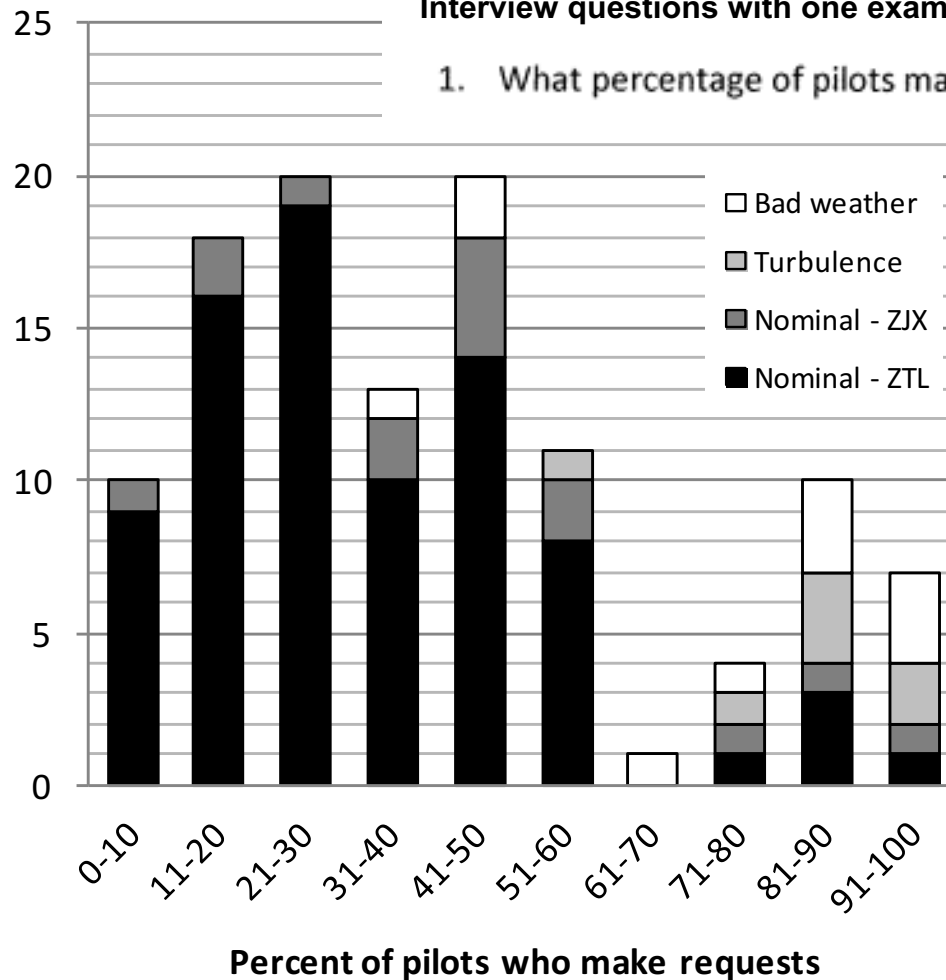


- About 30% of pilots make requests under nominal conditions
- Increasing to 90% under weather and turbulence

Most Common Pilot Requests



Frequency

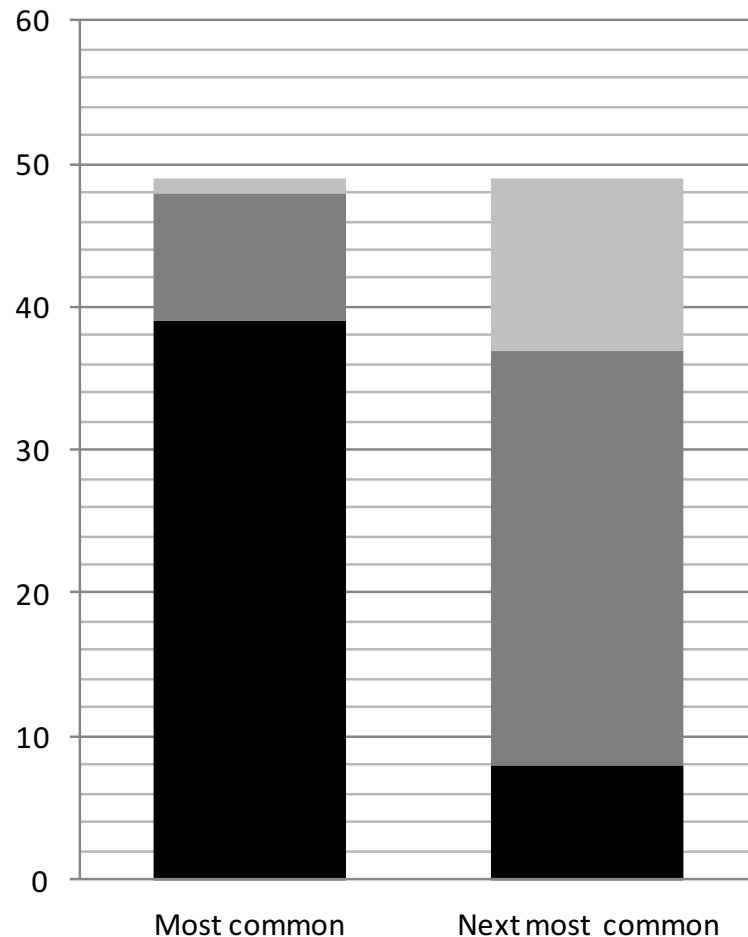

Interview questions with one example response

2. What is the most common type of trajectory change requested? short cut
3. What is the next most common type of trajectory change requested? altitude


- Weather deviation
- Altitude change
- Short cut

Most common requests are short cuts followed by altitude change (mostly for turbulence)

Request Evaluation Factors



Frequency

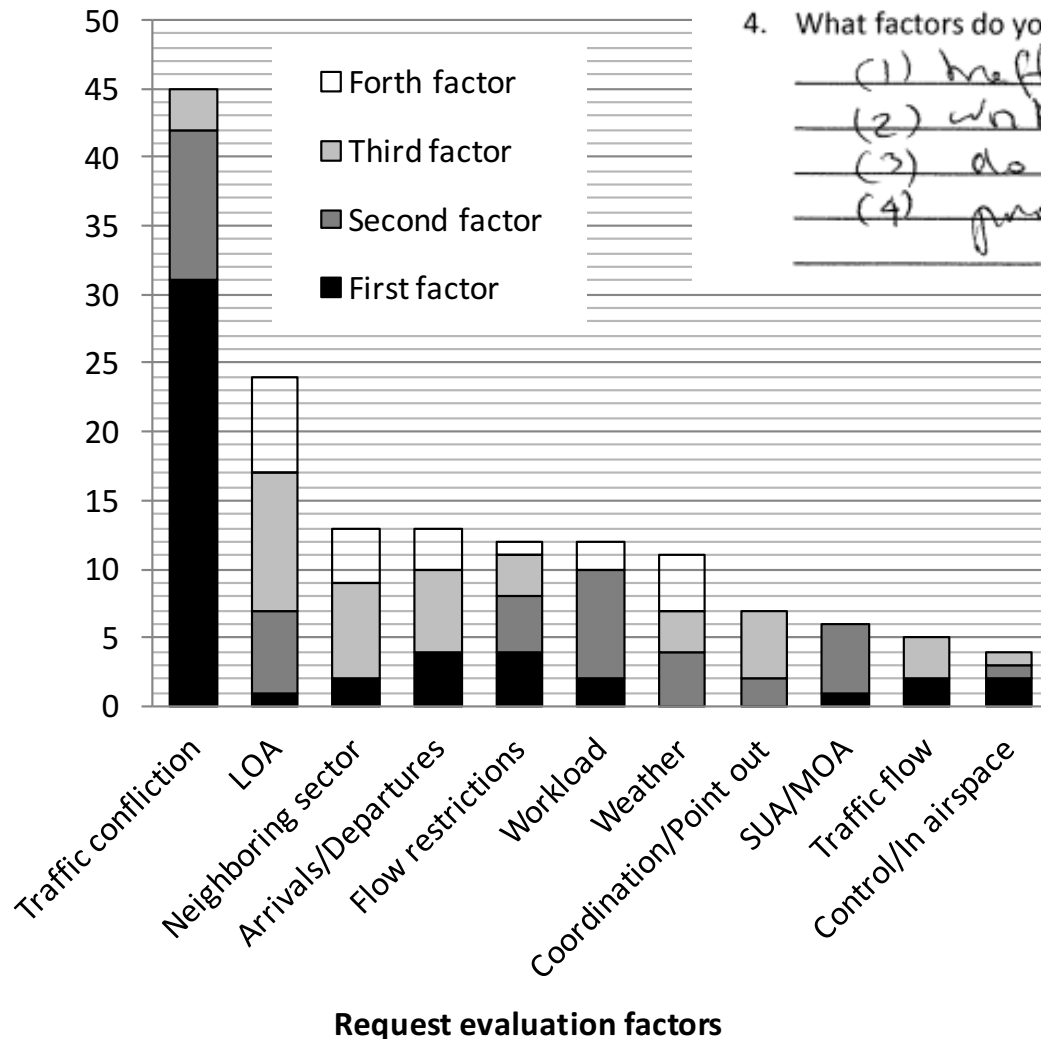

Interview questions with one example response

4. What factors do you consider when evaluating a request? _____
(1) traffic
(2) workload
(3) do I have control. (handoff).
(4) proximity to airport destination.

- Traffic confliction is first evaluation factor then letters of agreement (LOAs)
- Evaluation factors are subjective and their interpretation may differ between controllers


Request Rejection Rate



Frequency

Interview questions with one example response

5. What percentage of trajectory change requests do you reject? 20%

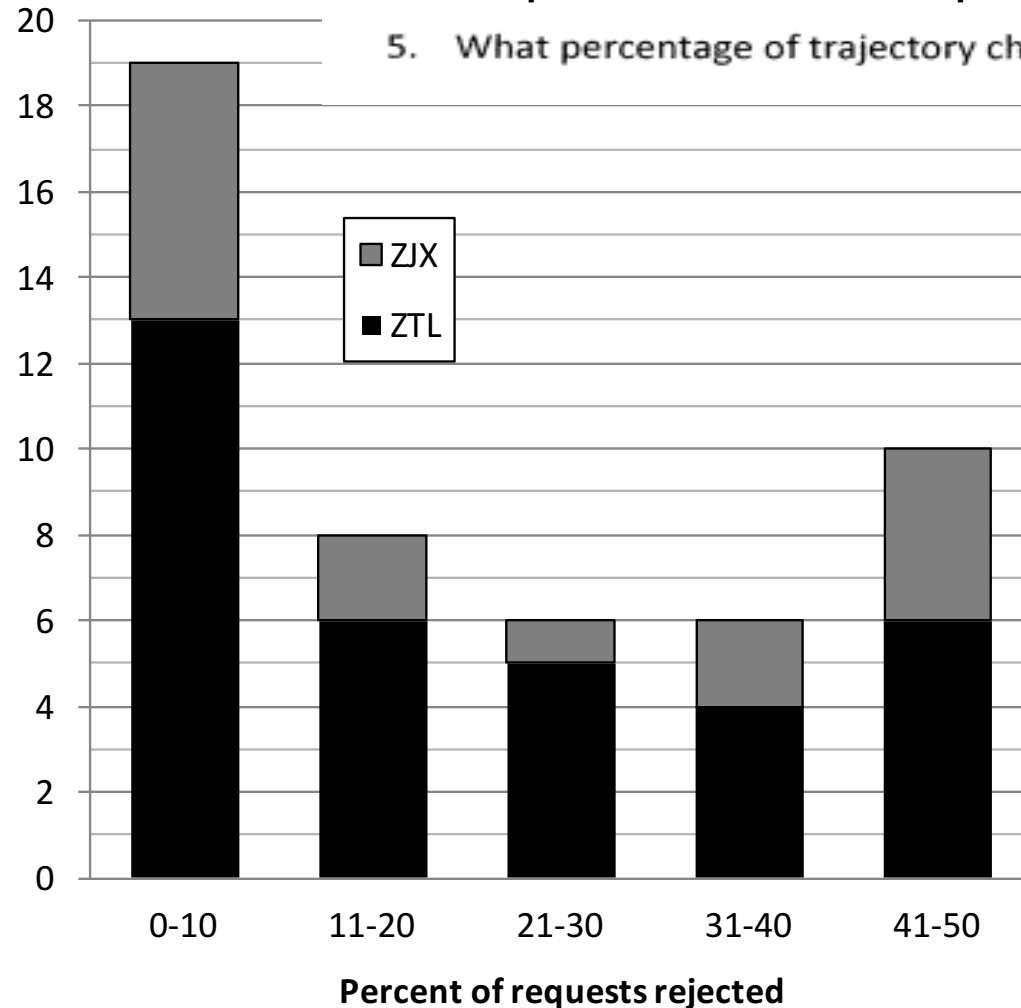

- All controllers reject less than 50% of requests
- Most controllers reject less than 10% of requests

Outline



- Background and Motivation
 - TASAR Concept and Technology Overview
 - TASAR Flight Test Overview
- Controller Acceptability Assessment Approach and Data Collection: Observations and Interviews
- Event Observations Overview
- **Results from Interviews**
 - General Statistics
 - Quantitative Acceptability Factor Characterization
- Concluding Remarks
- Current and Future Activities

Quantitative Data Collection



- Each controller provided examples of low, moderate and high workload situations

8. What constitutes high, moderate, and low workload? Give an example of each situation


| High workload | Moderate workload | Low workload |
|------------------|------------------------|----------------|
| WX + ≥ 5 o/c. | 15 o/c w/o right wx | < 10 no wx. |

- Then each controller was elicited about quantitative parameters that characterize the acceptability factors under the three workload levels

Sheets were filled by observers

| | High workload | | | Moderate workload | | | Low workload | | |
|--|-----------------------|--|--|-------------------|--|----------|--------------|--|---|
| Acceptable Distance from Active SUA | required 3 miles 3 | | | | | 3 | | | 3 |
| Acceptable Distance from Sector Boundary | have to have 2.5 3 | | | | | 0 | | | 0 |
| Clipping Sector Boundaries | no issue | | | | | no issue | | | → |
| Acceptable Time before Handoff | 5 min | | | | | 2 | | | 2 |
| | | | | | | 2 | | | 0 |

Acceptability Factors Studied

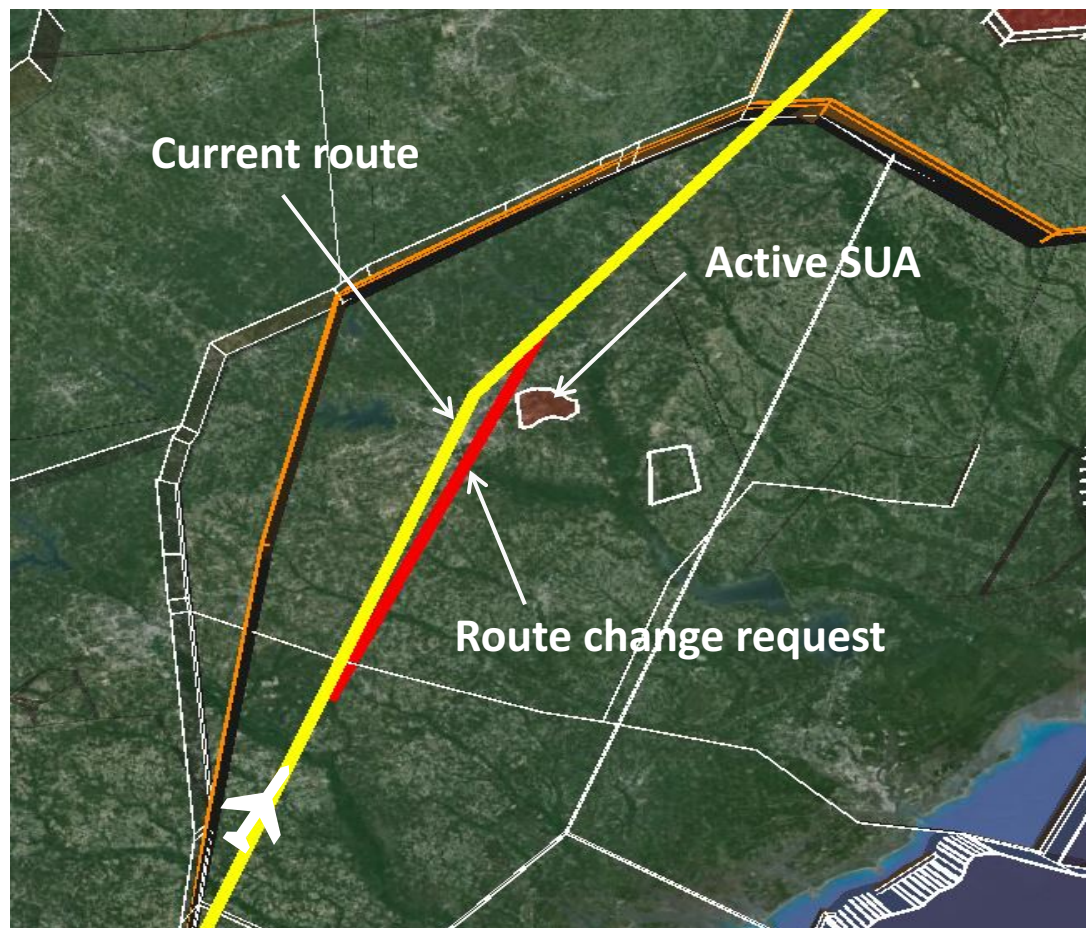

Factor 1:

How close can requested route be from an active SUA?






Scripted scenarios

Factor 1: Acceptable Distance from Active SUA




Acceptable **distance from an active SUA** ranged between 0 under low workload and 10 nautical miles under high workload

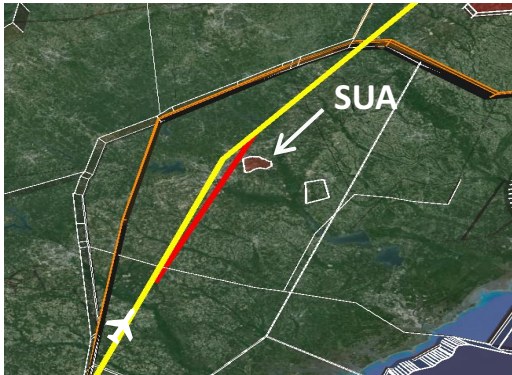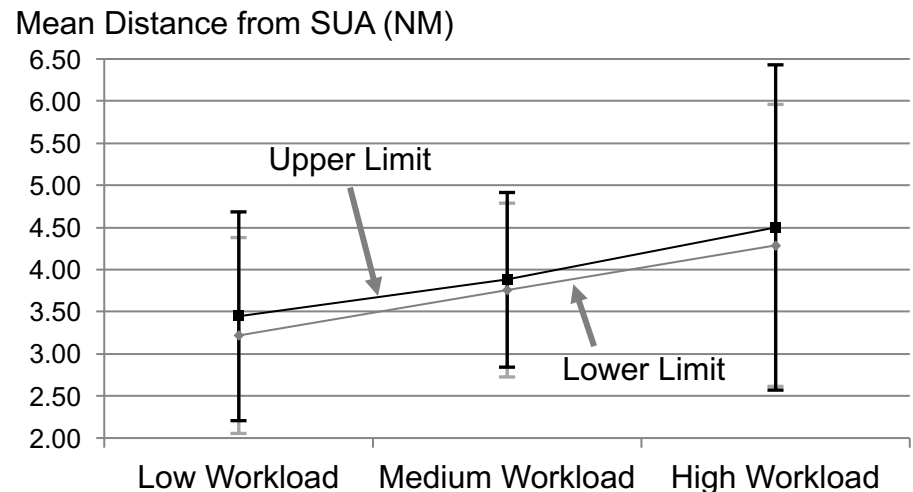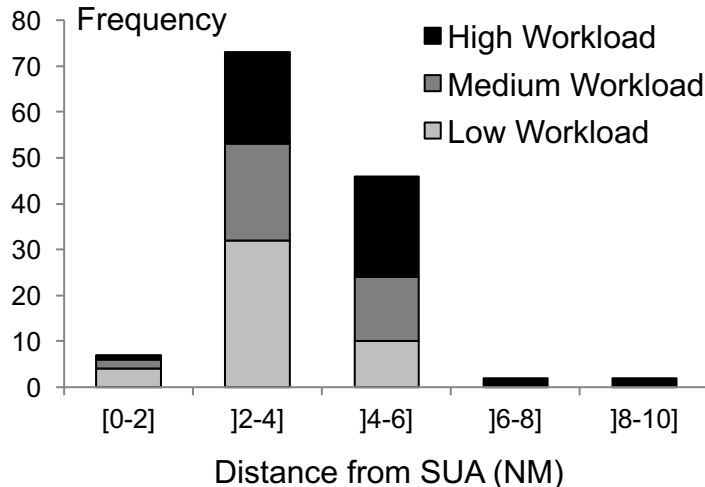

- ATC procedure requires 3 NM from active SUA
- **Recommendation:**
 - **Maintain 3 NM always**
 - **Add 2 NM under high workload**

Acceptability Factors Studied

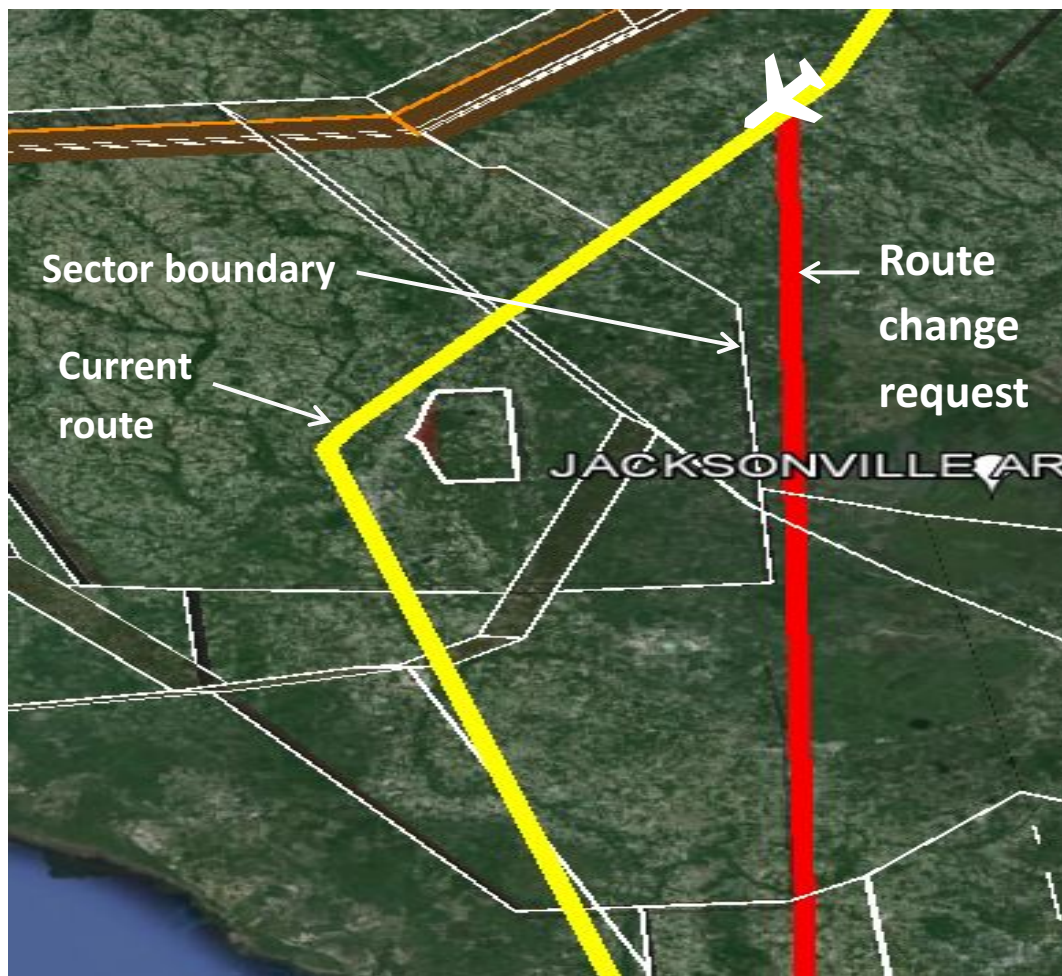

Factor 2:

How close can requested route be from boundary between sectors causing “point out” to neighboring sector controller?






Scripted scenarios

Factor 2: Acceptable Distance from Sector Boundary




Acceptable distance to **fly parallel to sector boundaries** ranged between 0 at low workload and 6 nautical miles at high workload

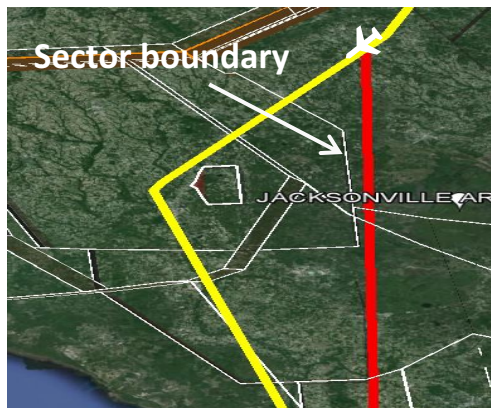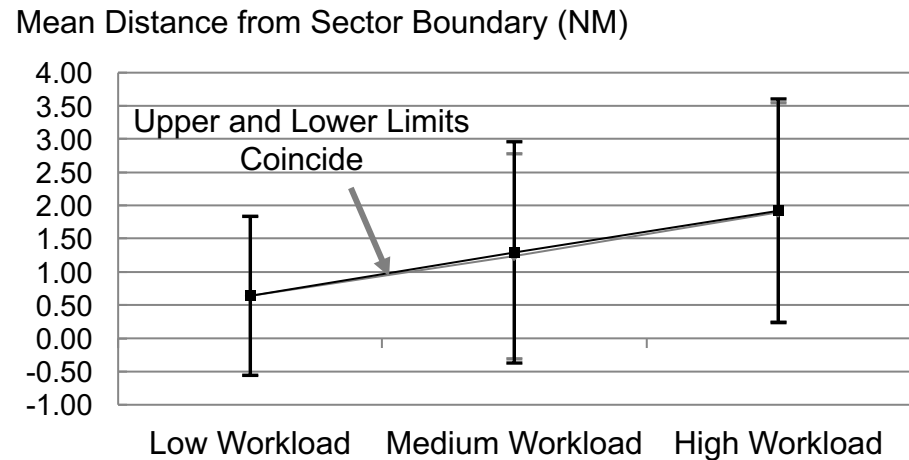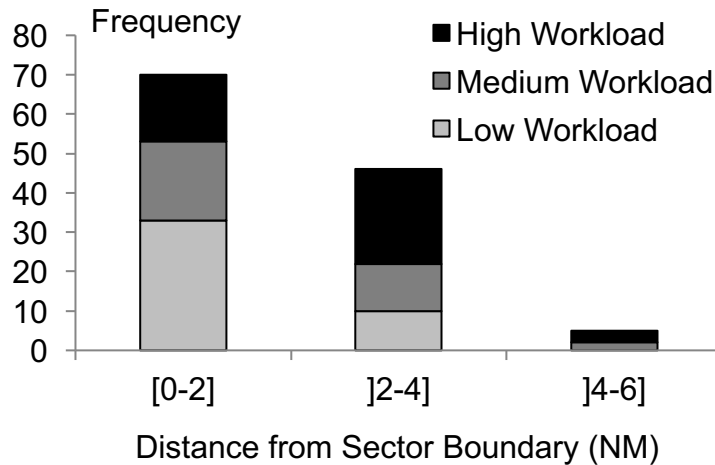

- ATC procedure requires point out at 2.5 NM
- **Recommendation:**
 - ➔ No buffer under low workload
 - ➔ Maintain 2.5 NM from boundary under high workload

Acceptability Factors Studied

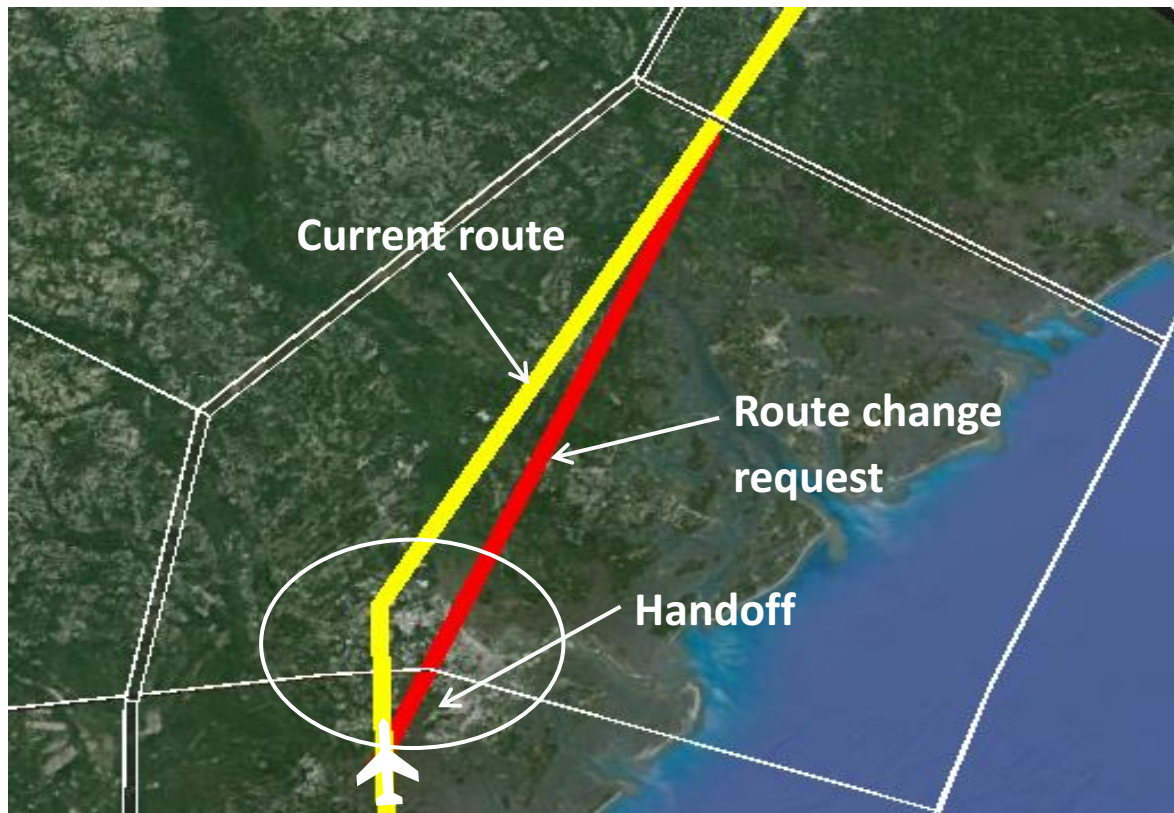

Scripted scenarios

Factor 3:



How does making route change request during or close to aircraft handoff from one sector to next sector affect acceptability?

— Flight Plan
— Request

Factor 3: Acceptable Time Before Handoff to Another Sector



Acceptable **time before handoff to another sector** ranged from 0 under low workload and 10 minutes under high workload situations

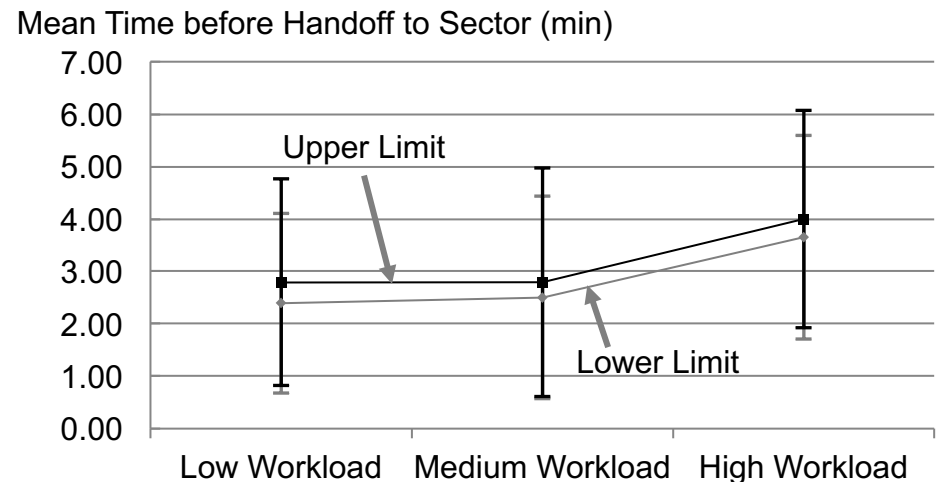
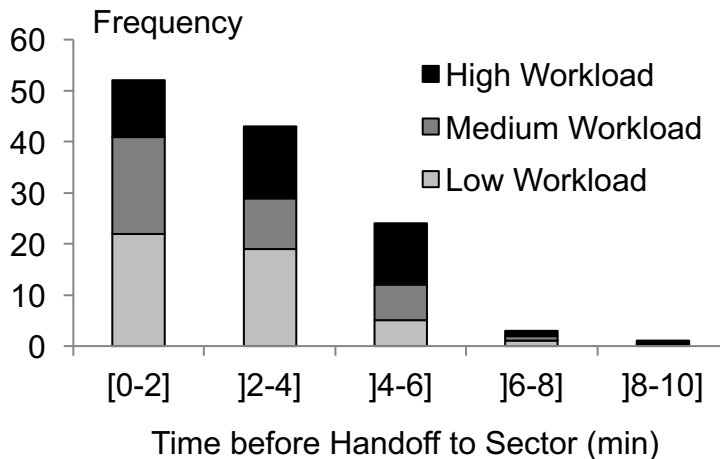


- Automated handoff flashes 3 NM from boundary
- **Recommendation:** Make request about 1 to 2 minutes before automated handoff threshold, mainly under high workload

Factor 3: Acceptable Time After Handoff




Acceptable **time after handoff from another sector** ranged from 0 under low workload and 2 minutes under high workload conditions

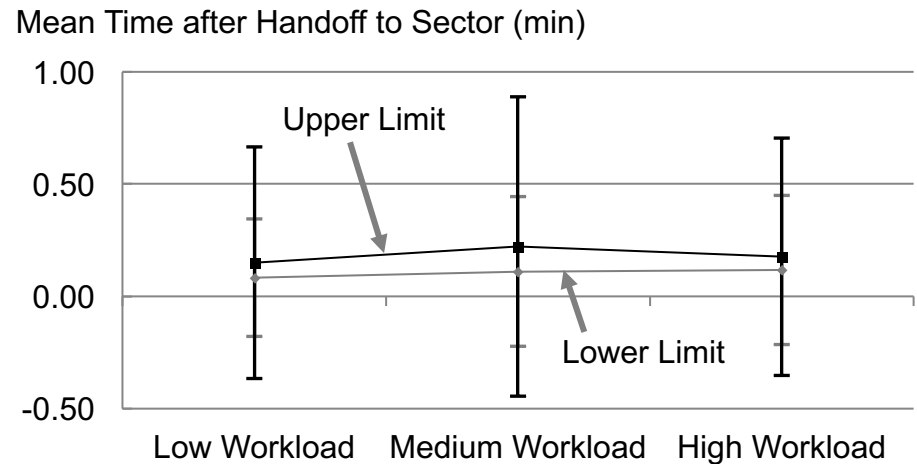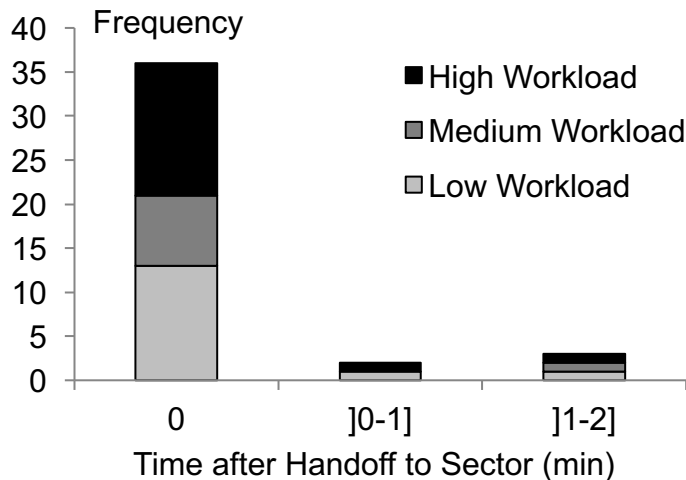

- Controllers want to know request as soon as possible after flight checks in on frequency
- **Recommendation: Do not delay request after handoff even under high workload**

Acceptability Factors Studied

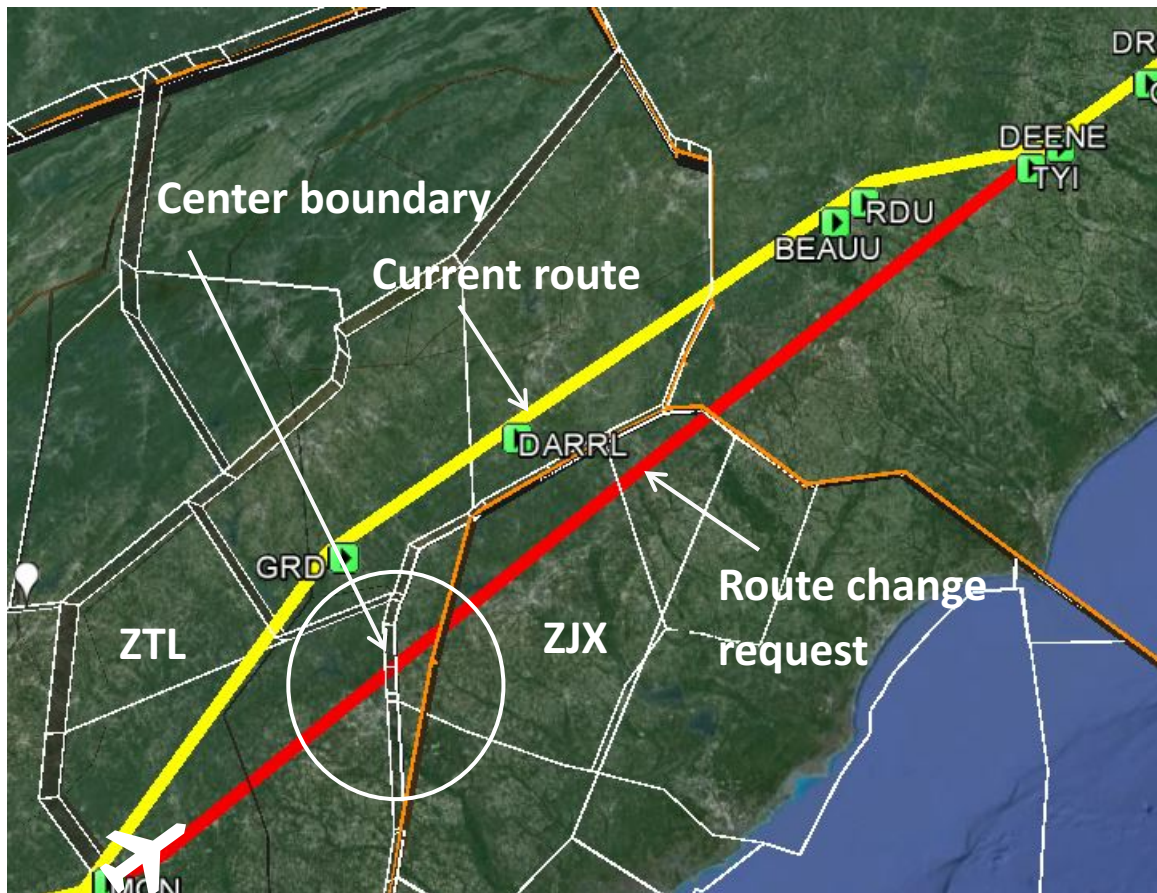

Scripted scenarios




Factor 4:

How does making route change request that crosses from current center to next center affect acceptability?

Factor 4: Acceptable Time Before Handoff to Another Center




Acceptable time before handoff to another center ranged from 0 under low workload and 10 minutes under high workload situations

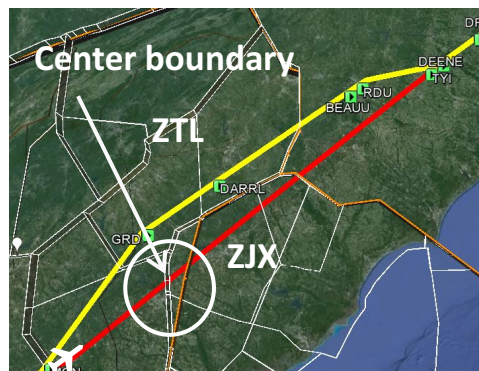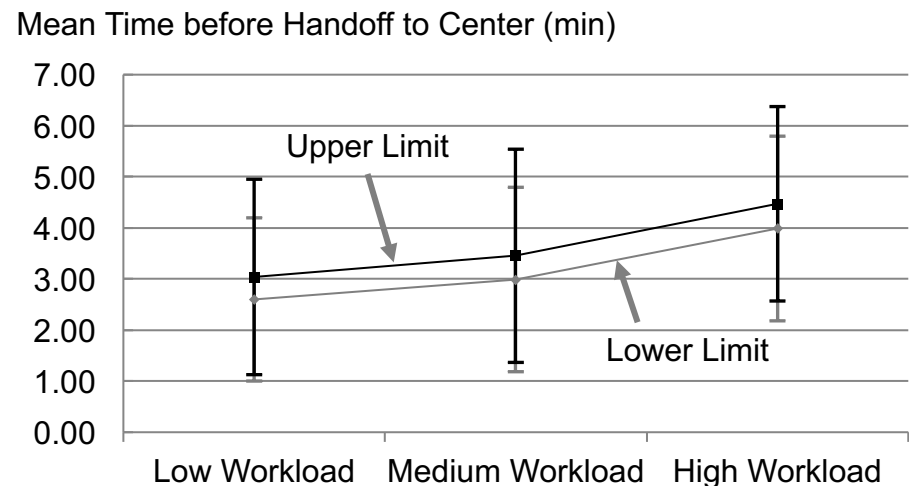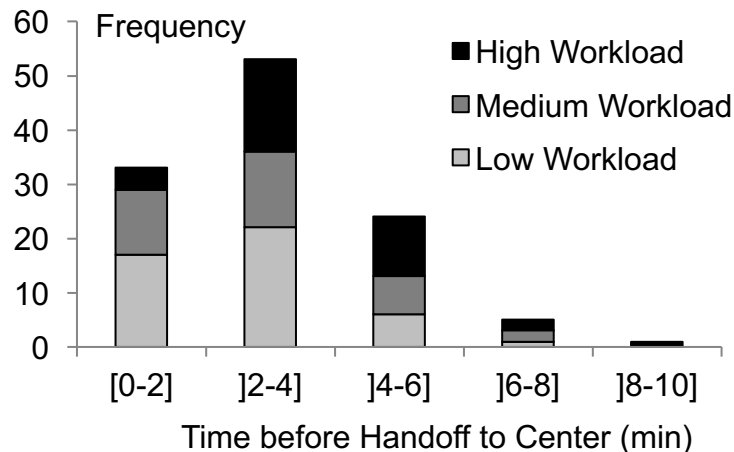

- Automated handoff flashes 3 NM from boundary
- **Recommendation:** Make request about 1 to 2 minutes from automated handoff threshold, mainly under high workload

Acceptability Factors Studied

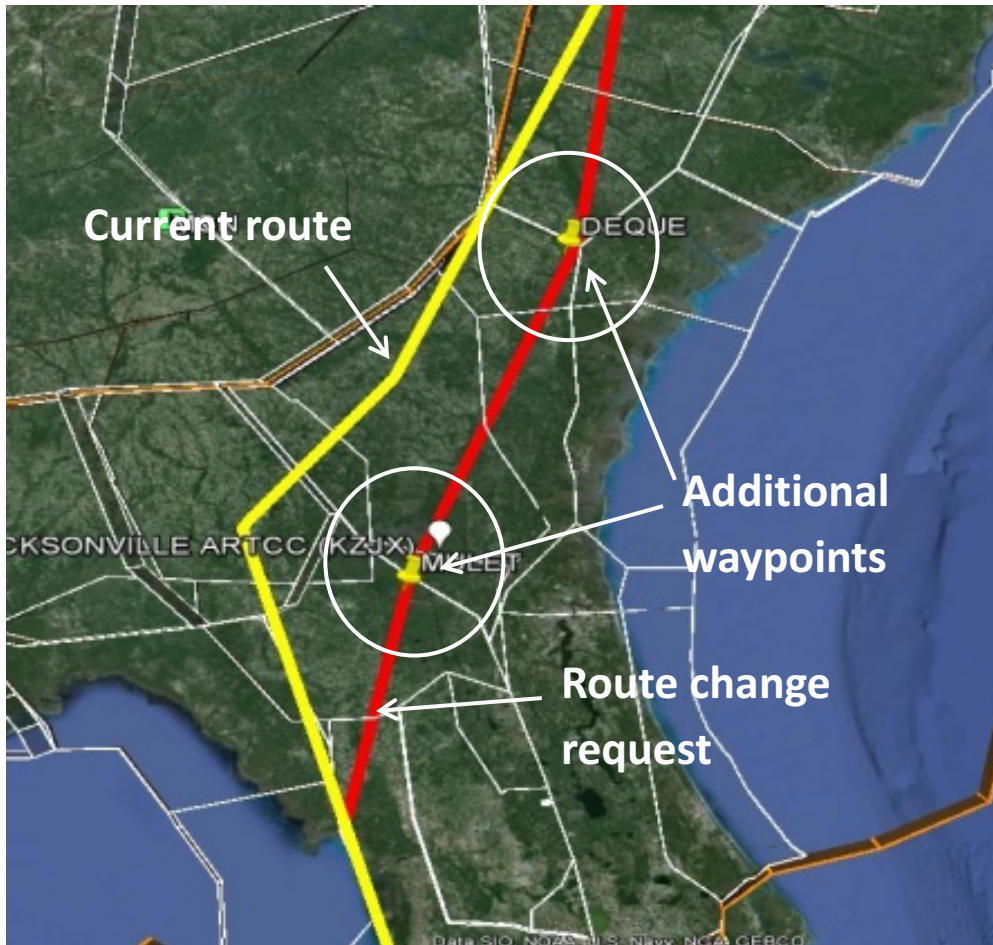

Scripted scenarios

Factor 5:


How many additional waypoints can route change request include to be acceptable?




Factor 5: Acceptable Number of Additional Waypoints



Acceptable **number of additional waypoints** ranged from 20 under low workload and 0 under high workload situations.

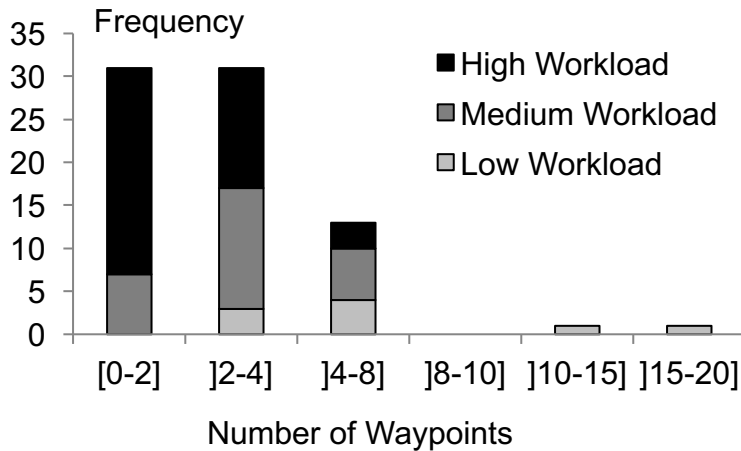


Mean Number of Waypoints

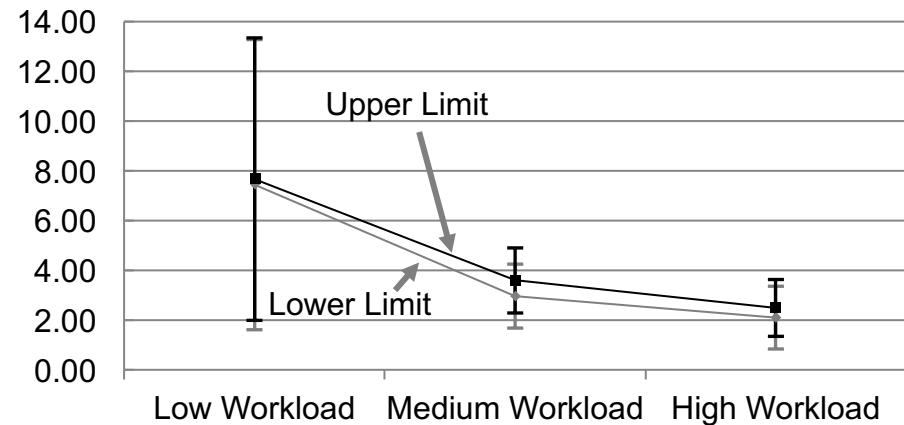

- Majority of controllers accept any number of additional waypoints under low workload
- Recommendation: Limit to 2 additional waypoints under high workload**

Acceptability Factors Studied

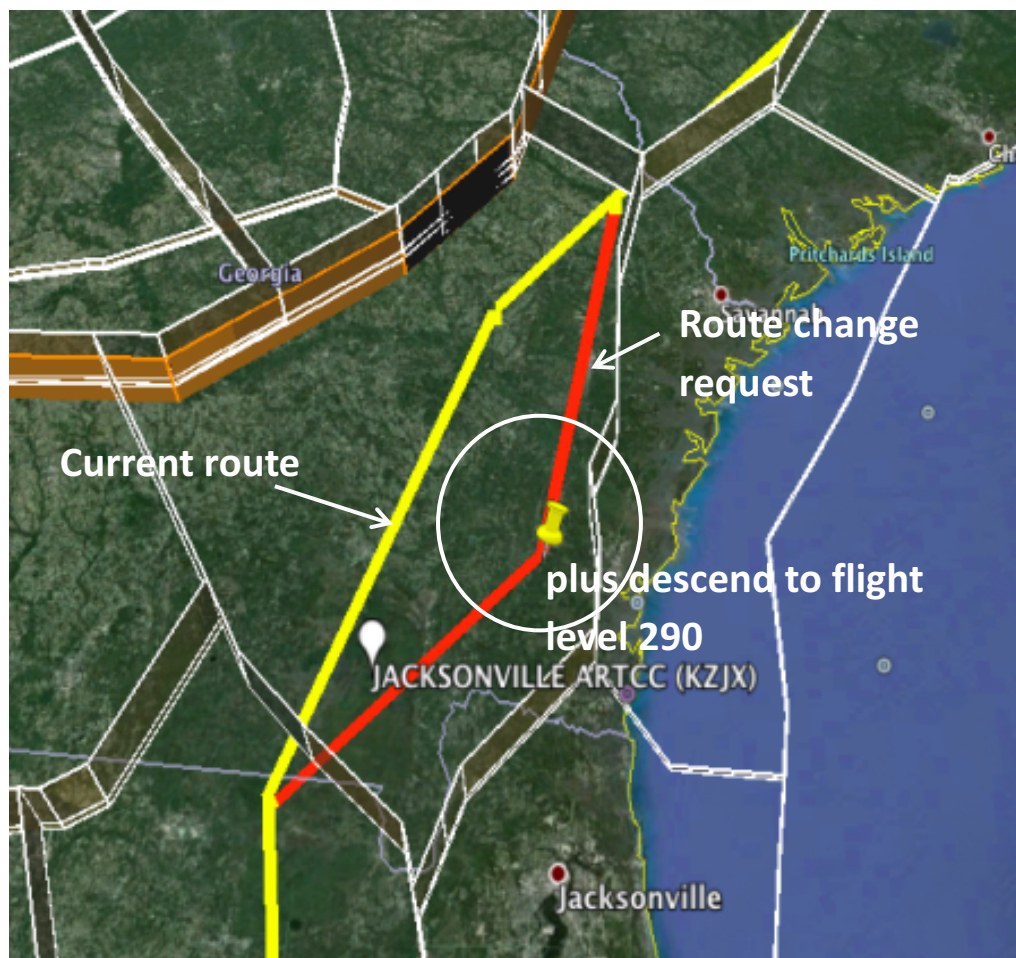

Factor 6:

Can route change request combine lateral and vertical maneuvers?

Recommendation:
No problem combining lateral and vertical maneuvers in request

Scripted scenarios



Additional Recommendations

- **Avoid unfamiliar waypoints** and waypoints that are not in database
- **Avoid violating LOAs** such as required routes and transition points particularly to major airports
- Avoid opposing common traffic flows at same altitude, particularly arrivals and departures of major airports
- **Avoid making requests during high workload**, for example, if controller on communication frequency is clearly busy
- Avoid making requests that interact with weather systems
- Avoid making requests that violate flow restrictions or pass through congested airspace
- **Consider request impacts on downstream sectors** not just the current sector where request is made

Outline



- Background and Motivation
 - TASAR Concept and Technology Overview
 - TASAR Flight Test Overview
- Controller Acceptability Assessment Approach and Data Collection: Observations and Interviews
- Event Observations Overview
- Results from Interviews
 - General Statistics
 - Quantitative Acceptability Factor Characterization
- Concluding Remarks
- Current and Future Activities

Concluding Remarks



- Controllers made concerted effort to accommodate pilot requests
- All controllers were enthusiastic about pilots knowing about their environment when making requests, for example
 - Know sector boundaries
 - Avoid traffic conflict and major arrival/departure flows
 - Avoid violation of LOA's
- Some controller acceptability factors can be quantified and included in automation logic, for example: Maintain 3 NM from SUA and 2 NM from sector boundary
- Acceptability is highly dependent on workload of current and downstream controller which is harder to incorporate in automation

Current and Future Activities



Research continuing under NASA's Airspace Technology Demonstration (ATD-3)

- Flight Trial 3 (2018) will investigate integration of weather constraints from on-board radar and from ground sources
- Air-ground integration between aircrew and dispatch (2018-2020)
 - TAP for aircrew route advisories accounting for onboard weather and ADS-B traffic constraints
 - NASCENT for dispatch route advisories accounting for fleet-wide objectives and constraints, ground-based weather constraints, traffic congestion, and traffic flow restrictions
 - Partnership with major airline: demonstration on up to 10 aircraft by 2020

Acknowledgment



- The authors extend their utmost appreciation to the **Federal Aviation Administration (FAA)** and the **National Air Traffic Controllers Association (NATCA)** for opening their doors to our research and providing the logistics that resulted in its smooth conduct. Our appreciation includes many names from top management, escorts, and controllers who graciously allowed us to observe and interview them
- We would also like to thank the researchers from **NASA**, **Engility Corporation**, and **Advanced Aerospace Solutions, LLC**, who were instrumental in preparing the tools and procedures needed



Questions?

husni.idris@nasa.gov

Backup Slides



TASAR Flight Trial 2 Overview




- TASAR Flight Trial 2 goal:
 - Increase operational readiness of TASAR for airline partnership activities
- Several objectives to accomplish this goal:
 1. Verify TAP software operates effectively on partner airlines hardware
 2. Verify processing of external data
 3. Assess methodology to characterize TAP computed outcomes
 4. **Assess pilot and controller acceptability of TASAR requests**
 5. Assess usability and acceptability of TAP HMI
 6. Assess effect on crew resource management (CRM)

Example Event: Request Intrudes into Active Military Airspace




Request rejected
due to interference
with active military
airspace (MOA)
Moody

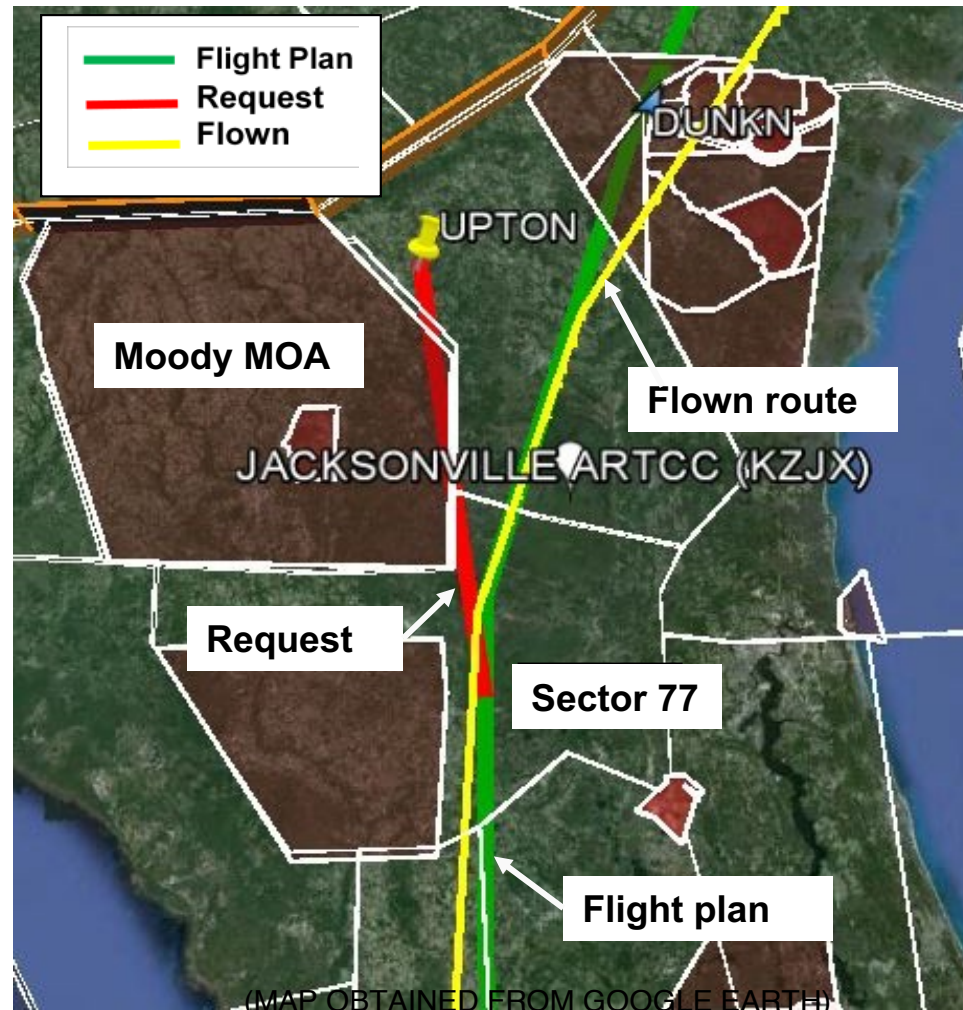

Example Event: Request Interacts with Convective Weather Activity



Request was accepted by sector 22 which had low workload, then it was rejected by next sector 06 due to weather and holding patterns in sector. Flight was tactically handled by Sector 22 along boundary and handed off to Sector 50

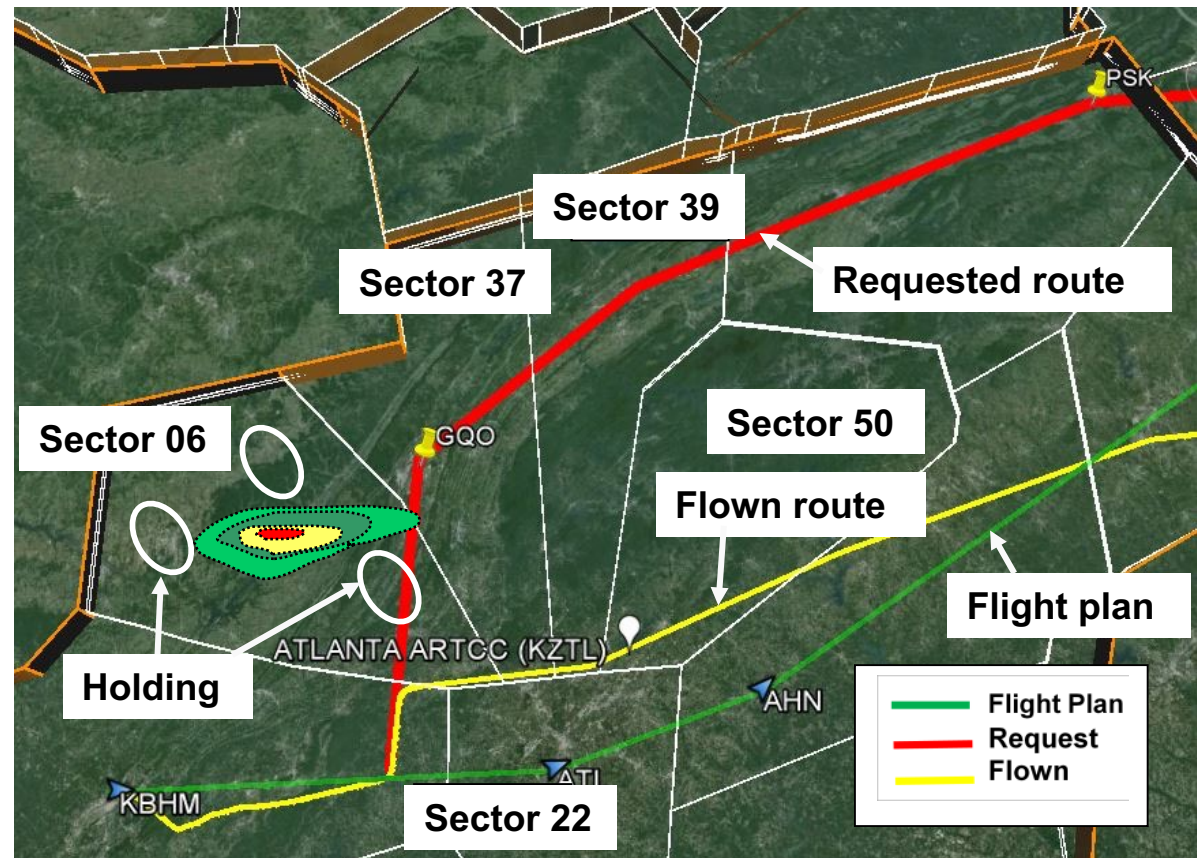

WEATHER EVENT (MAP OBTAINED FROM GOOGLE EARTH).